



50,000 HOURS



YEARS' WARRANTY



ONSITE WARRANTY



CCT SELECTABLE



WATTAGE SELECTABLE



IK08



IP65



NEXT DAY DELIVERY



VENTURE LIGHTING



YEARS' ONSITE WARRANTY



SELECTABLE wattage



SELECTABLE CCT



Indoor and outdoor trims are provided as standard for ultimate versatility.



The IP65 rated Berwick bulkhead comes with **selectable power output and selectable CCT** making it a versatile solution that is suitable for almost all applications.

With **four conduit entry points**, this fitting is also **easy to install and maintain**.

Available with Emergency and Microwave sensors.

# BERWICK BULKHEAD


Order Code: AMY010-SM-EM

Photometric Data	
Selectable Power Levels	8W / 9W / 12W / 13W
Selectable Lumens	875lm / 1025lm / 1300lm / 1395lm
Selectable CCT	3000K / 4000K / 6500K
Colour Rendering Index (CRI)	80-89
Photobiological Risk Group	RG0
LPW (lm/W)	107
Colour Temperature (K)	3000-6500
Light Distribution	Symmetric
Lens / Reflector	Diffuser lens/optic/panel

Life Data		
Rated Life (Hrs)	Ta = 25C	
	50000	
Lumen Maintenance (Hrs)	Ta = 25C	
	B50	
	L70	50000
	L80	-
L90	-	

Electrical Data	
LED Power	6-11
Microwave Sensor	Yes
Integral Emergency Inverter	Yes
Battery Type	LiFePO4
Light Sensor	No
PIR Sensor	No
Input Current (mA)	40-60
No. Per B16 Breaker	63
No. Per C16 Breaker	108
Input (W)	13
Input (V)±10%	220-240
Voltage Type	AC
Power Factor	0.8
Electrical Class	II
Type of Wiring	Ending
Wiring X-sec (mm <sup>2</sup> )	1.5
Non-dimmable	Yes
Emergency Lighting	Yes

Physical Data	
Warranty (yrs)	5
Ambient Rated Temperature Range (°C)	5-40
Degree of Protection (IP)	IP65
Housing Colour	White
Housing Material	Plastic
Height/Depth (mm)	85
Diameter (mm)	291
Suitable for surface mounting	Yes
Lamp Type	LED exchangeable
Cover Material	Plastic- opal
Impact Strength	IK08

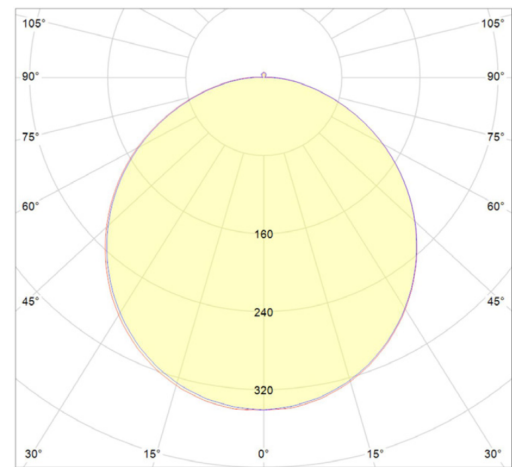

Order Code: AMY010-SM-EM

**Logistical Data**

Packaging Length (mm)	300
Packaging Width (mm)	300
Packaging Height (mm)	130