



50,000
HOURS

5
YEARS'
WARRANTY

NEXT DAY
DELIVERY

EXTERIOR RANGE



VENTURE
LIGHTING

IK07

IP65

OUTDOOR
PROTECTION



AVAILABLE IN
15W AND 26W

New for 2020! The Walney Wallpack is a **robust die-cast aluminium wallpack** featuring an **in-built photocell**. **Designed with low glare asymmetric light output, this sleek and discrete design is perfect for perimeter and walkway lighting.** Available in **15W and 26W outputs** for impressive **energy savings and long life.**

The 26W model is colour switchable between 3000K, 4000K and 5000K.

WALNEY WALLPACK

15W Walney Wallpack, Photocell, 840



Order Code: WAL001

Photometric Data	
Lumens	1800
Colour Rendering Index (CRI)	80-89
LPW (lm/W)	120
Colour Temperature (K)	4000 - 4000
SDCM	<5
Light Distribution	Symmetric/asymmetric
Lens / Reflector	Refractor Lens

Life Data	
Rated Life @ 25°C (Hrs)	50000
Rated Life L90/B50 @ 25°C	50000

Electrical Data	
Input (W)	15
Input (V)±10%	120 - 270
Voltage Type	AC
Input Current (A)	0.075
Power Factor	0.9
THD (%)	<10
No. Per C16 Breaker	48
Energy Efficiency Class (EEC)	A++, A+, A (LED)
Electrical Class	I
Short Circuit Protection	Yes
Thermal Overload Protection	Yes
Wiring X-sec (mm ²)	1.5
Non-dimmable	Yes
LED Nominal Current (mA)	230 - 230

Physical Data	
Degree of Protection (IP)	IP65
Housing Colour	Black
Housing Material	Aluminium
Length (mm)	218
Width (mm)	147
Height/Depth (mm)	78
Weight (kg)	0.9
Warranty (year)	5
Case Material	Aluminium
Suitable for wall mounting	Yes
Suitable for surface mounting	Yes
Lamp Type	LED Not Exchangeable
Cover Material	Structured Plastic
Impact Strength	IK07

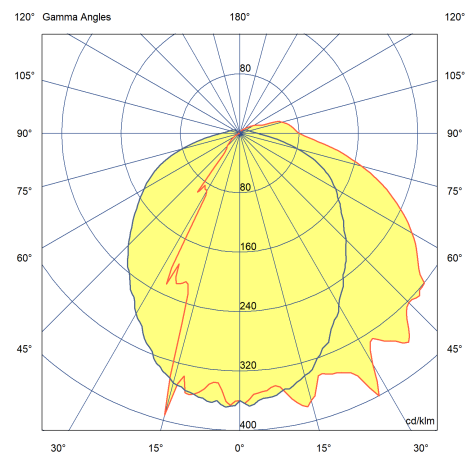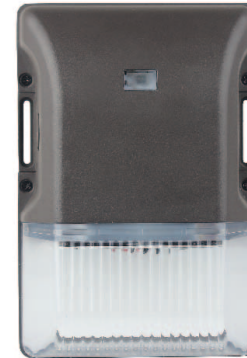

Order Code: WAL001

Environmental Data

Ambient Rated Temperature Range (°C)	-30 to 45
--------------------------------------	-----------

Accessories

-

Logistical Data

Item Gross Weight (kg)	0.9
Packaging Length (cm)	22.5
Packaging Width (cm)	15.4
Packaging Height (cm)	8.8
Carton Quantity	10
Carton Length (cm)	460
Carton Width (cm)	325
Carton Height (cm)	245
Carton Gross Weight (kg)	9.5